





DESIGNED TO PERFORM

RXAH46

THE RXAH46 WATER SOURCE AIR HANDLER

UPFLOW - DOWNFLOW - HORIZONTAL INSTALLATION - HEAT ONLY

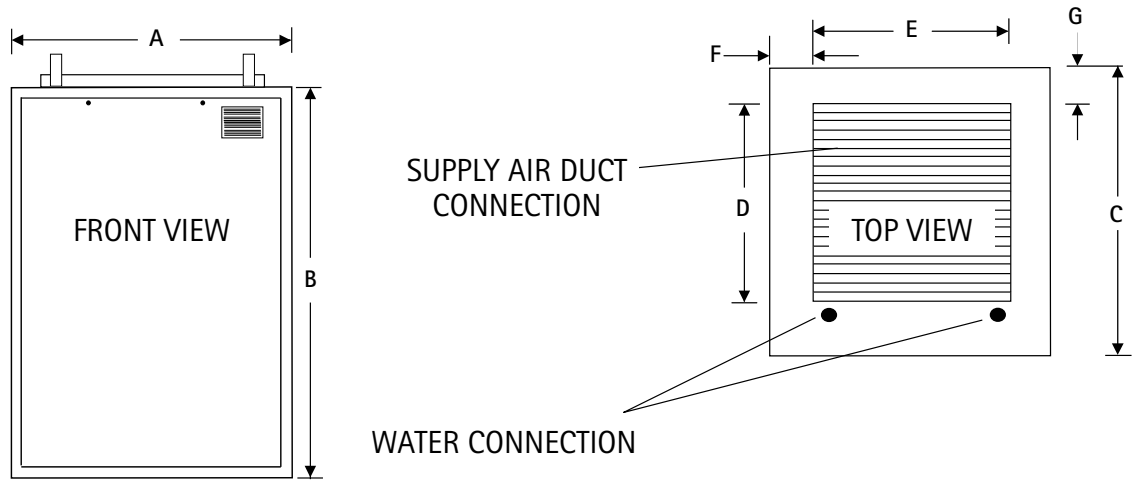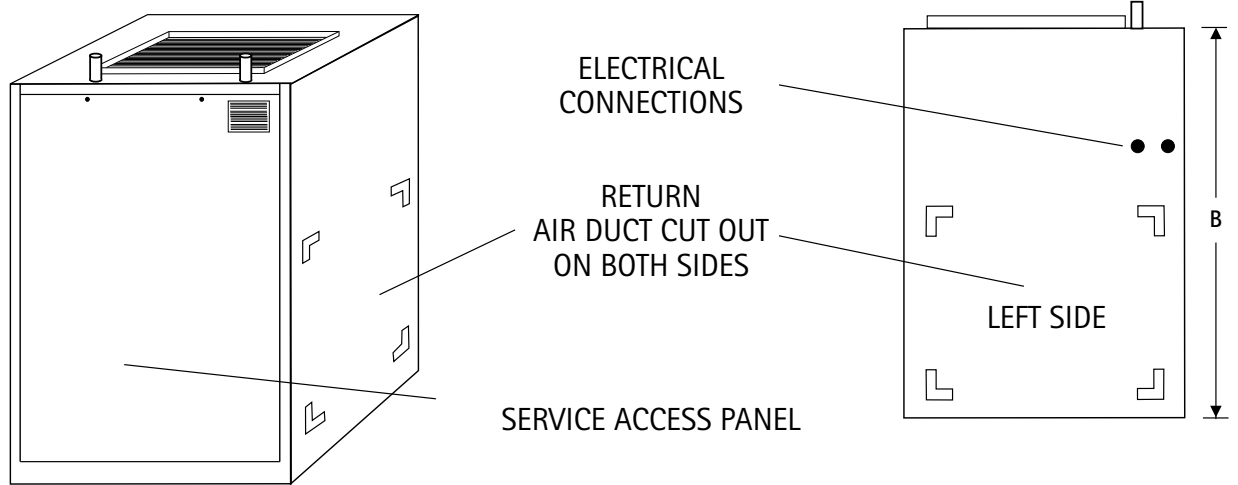

A	B	C	D	E	F	G
20"	29.5"	24"	16"	16"	2"	1.25"



DESIGNED TO PERFORM

RXAH46

UNIT TECHNICAL INFORMATION

POWER REQUIREMENTS	120 VAC, 1PH
MAXIMUM FUSE	15 AMPS
TOTAL AMPS	5 AMPS
TRANSFORMER	40 VA
BLOWER MOTOR	1/3 HP ECM
PUMP	1/8 HP 3-SPEED
FILTER SIZE	16" x 20"
RETURN DUCT	15" x 19"

HEATING CAPACITY

AIRFLOW CFM	WATER FLOW GPM	RETURN AIR Deg F	SUPPLY WATER Deg F	OUTPUT BTU	SUPPLY AIR Deg F	LEAVING WATER Deg F
	3	70	140	32000	120.0	118.2
600	4	70	140	33500	122.3	122.9
	5	70	140	34400	123.6	126.0
	3	70	140	38300	114.8	114.0
800	4	70	140	40700	117.6	119.3
	5	70	140	42100	119.3	122.8
	3	70	140	43400	110.6	110.6
1000	4	70	140	46600	113.6	116.3
	5	70	140	48700	115.6	120.1

BLOWER CAPACITY

MOTOR SPEED	CFM AT 0.4" E.S.P.
LOW	600
MEDIUM	800
HIGH	1000